

6. INSTALLATION

1. Wiring

- (1) Insert plug ② of transfer cable ① all the way into connector ③ of the embroidery machine. Secure the plug by tightening two screws ④ on both sides of the plug ②.
- (2) Insert plug ⑥ of DC power cord ⑤ all the way into connector ⑦ of the embroidery machine. Secure the plug ⑥ by turning the outer casing.
- (3) Insert the other plug ⑦ of DC power cord ⑤ all the way into connector ⑨ of power supply box ⑧. Secure the plug ⑦ by turning the outer casing.
- (4) Insert plug ⑪ of AC power cord ⑩ all the way into connector ⑫ of the power supply box ⑧.
- (5) For wiring of editing machine AMC388 and disk reader AMC330, refer to the respective manuals.
- (6) When the above wiring is complete, insert plug ⑬ of AC power cord ⑩ to a receptacle.

NOTE: Always connect AC power cord ⑩ of power supply box ⑧ to a receptacle with ground pin.

- (7) The above completes wiring of the AD830.

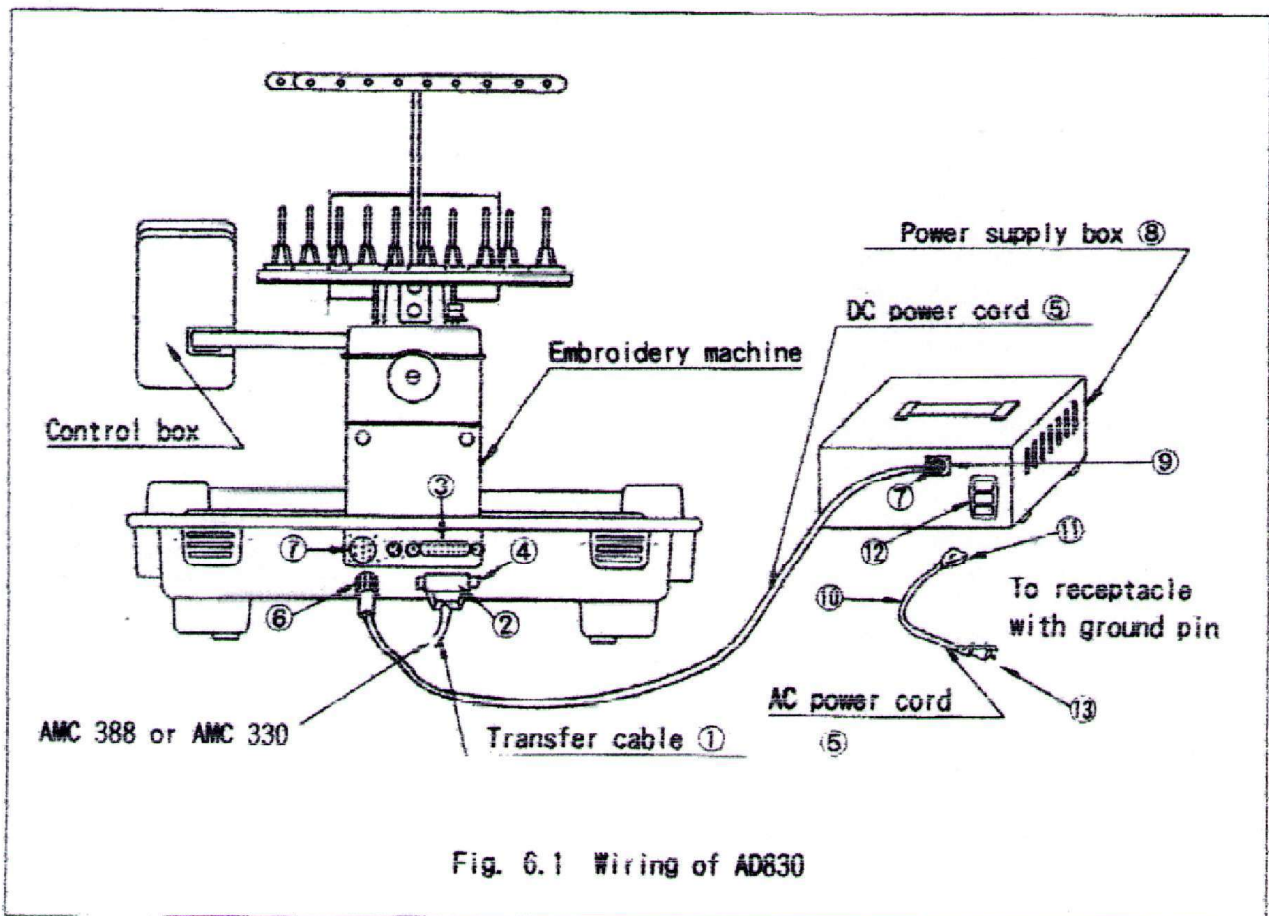


Fig. 6.1 Wiring of AD830